


### Up to 56 Gbit/s NRZ 700-870 nm Single channel optical receiver

Product Code: R56-850TB

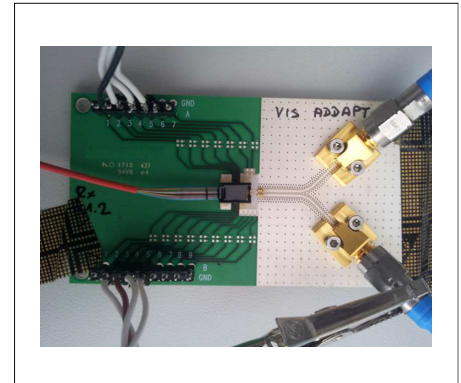

Sample image only. Actual product may vary.

## Preliminary

### Product Description

The R56-850TB optical receiver module utilizes a PIN photodetector and limiting transimpedance amplifier (TIA) assembled onto a high speed adaptor board with differential electrical signal output. The multi mode fiber coupled module with FC/PC connector input is designed for short reach ultrahigh-speed data communication applications of up to 56Gbit/s using NRZ modulation. Each part is electro-optically tested to ensure a maximum performance

### Features

- up to 56 Gbit/s data rate
- 50/125 um fiber coupled testboard
- 1.85 mm electrical RF connectors
- FC/PC optical connector

### Applications

- CEI-56G-NRZ (XSR/USR/MR/LR)
- Proprietary optical interconnects
- Research and development

Parameter	Typical (PD chips)	Notes
Operating Wavelength	700 ~ 870 nm	
Data rate	up to 56 Gbit/s	NRZ modulation
Rise time (20% to 80%)	~ 6 ps	
Maximum power consumption	280 mW	

All product specifications and descriptions are subject to change without notice.

### Electro-optical characteristics ( at Tcase = 25 °C)


Preliminary

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Wavelength responsivity	$\lambda$		700	850	890	nm
Case operating temperature	$T_{op}$		-10		85	°C
Supply voltage	$V_{cc}$		3.3		3.4	V
Supply current	$I_{cc}$		34	45	61	mA
Bandwidth	BW			50		GHz
Low frequency cutoff					70	kHz
Sensitivity (OMA)	S			-13	-12	dBm
Output resistance	$R_o$			100		$\Omega$
Optical overload			1.5			dBm
Differential output voltage	$V_{out}$				280	mV
Duty cycle distortion				1	10	%

### Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Storage temperature	$T_{st}$	-10	+50	°C
Incident optical power	$P_{in}$		+5	dBm
Power supply voltage	$V_P$		4.0	V

### Dimensions

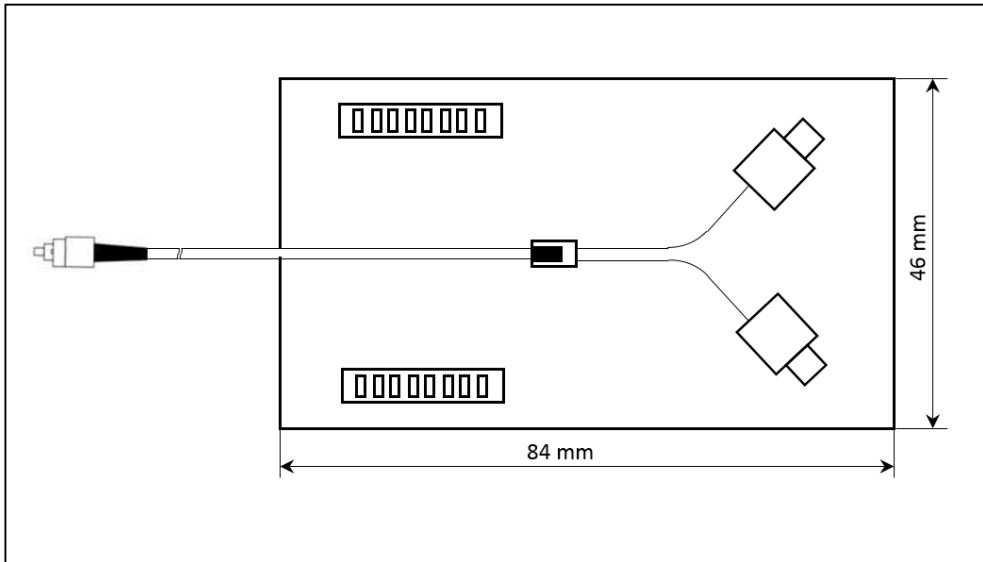

#### VI Systems GmbH

Hardenbergstrasse 7

10623 Berlin

Tel.: +49 30 3083143 30

Fax: +49 30 3083143 59

sales@v-i-systems.com

www.v-i-systems.com



www.facebook.com/VISystems

All product specifications and descriptions are subject to change without notice.

Please contact our sales department for additional information and to receive a quotation: sales@v-i-systems.com